

DESIGN



- ① Battery
- 2 Center management Cabinet
- 3 Cooling fan



Multiple capacity options

From 153.6V to 819.2V

Compact size, higher capacity
Quick installation, quick connection







13U



Features









BMS Management



Easy




Full Protection



Cycle Life



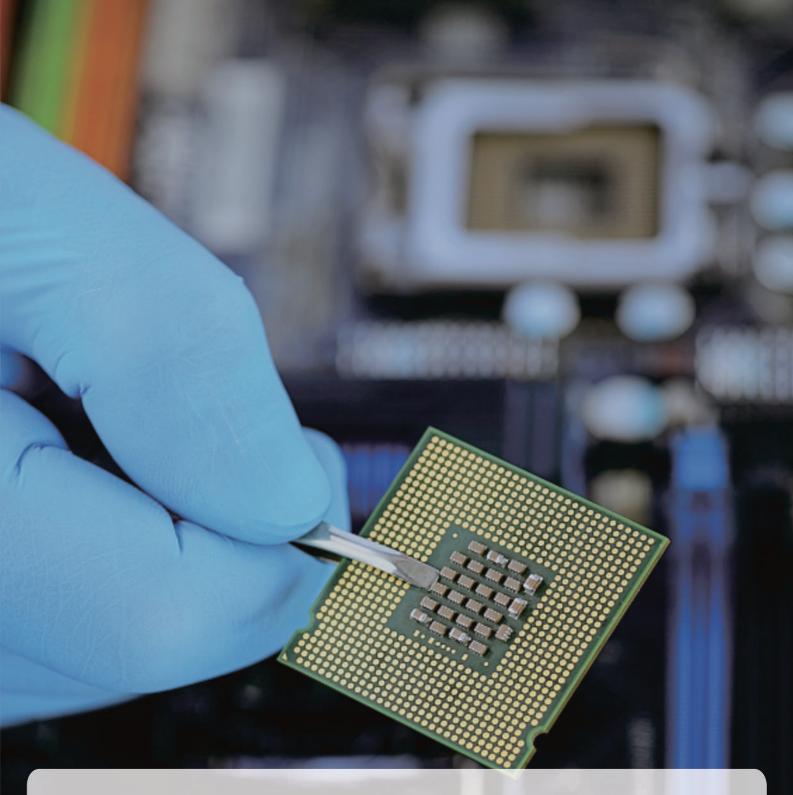


Full Protection

- Over Charge Protection
 Electric leakage protection
- Over temperature protection
 Short Circuit Protection

EV Charging

81.92kwh battery charge 2 times for a car from 0 to full

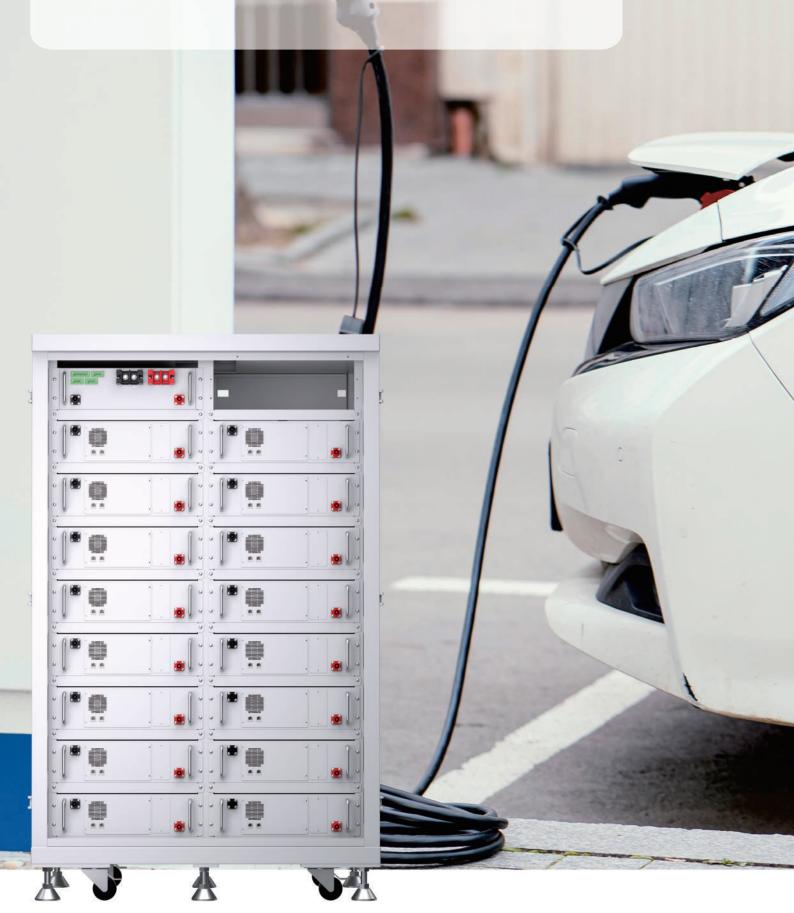



COOPERATIVE PARTNER















































